


# 628.25 AS-C

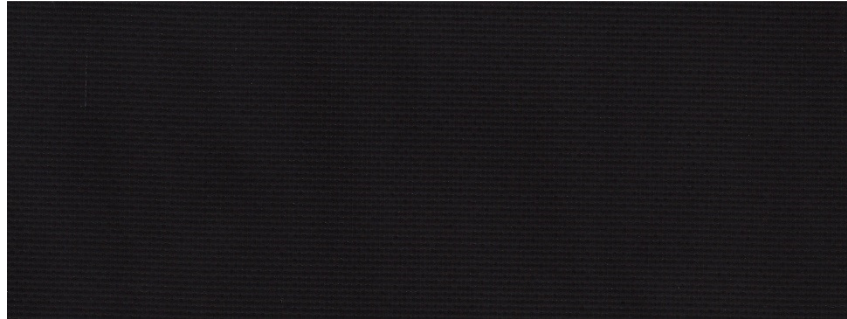

| Product           | Product category        | Coating |
|-------------------|-------------------------|---------|
| PTFE GLASS FABRIC | BLACK ANTI-STATIC SERIE | PTFE    |

| Properties                                              | Metric     |                   | Imperial    |            |
|---------------------------------------------------------|------------|-------------------|-------------|------------|
| Standart width(s)<br><i>Please ask for other widths</i> | 1000, 1500 | mm                | 39.5, 59.1  | inches     |
| Thickness                                               | 0,23       | mm                | 0.0091      | inches     |
| Weight                                                  | 470        | gr/m <sup>2</sup> | 13.86       | oz/sq yd   |
| PTFE content                                            | 57         | %                 | 57          | %          |
| Surface resistance                                      | < 100      | kohm/sq           | < 100       | kohm/sq    |
| Tensile strength                                        | 2300       | N/5 cm            | 263         | Ibs/inches |
| Temperature resistance                                  | -73 /+260  | °C                | -100 to 500 | °F         |

Anti-static products are made with a specially formulated black PTFE coating. These fabrics eliminates static electricity during operation. Conductive black products are widely used in the apparel industry as conveyor belts in fusing press machines. The product does not contain banned substances as described in RoHS directive and will not affect RoHS compliance.



Note: Nominal thickness, weight and tensile strength values are typical and are not intended as a specification minimum. Weight Tolerance g/m<sup>2</sup> = ±%5  
 All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained here in are based on test results FIBERFLON believes to be reliable, but they are not to be construed in any manner as warranties expressed.  
 All data is subject to change without notice.