


4110

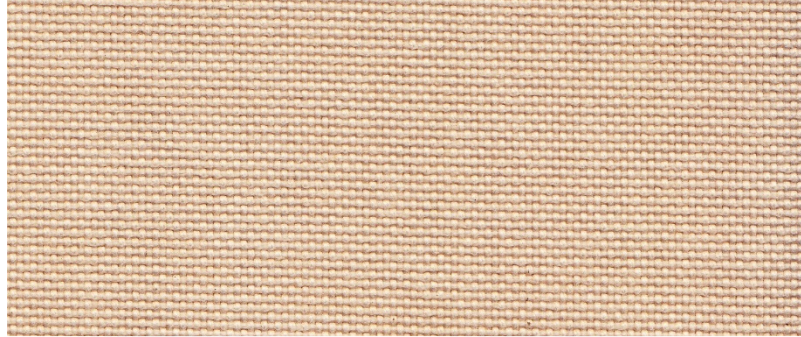

Product	Product category	Coating
PTFE GLASS FABRIC	ARCHITECTURAL FABRICS	PTFE

Properties	Metric		Imperial	
Standart width(s) <i>Please ask for other widths</i>	3100	mm	122	inches
Thickness	0,50	mm	0.0197	inches
Weight	830	gr/m ²	24.48	oz/sq yd
PTFE content	50	%	50	%
Tensile - <i>Warp x Weft</i>	4200 x 4000	N/5 cm	480 x 457	Ibs/inches
Tear - <i>Warp x Weft</i>	340 x 320	N	76 x 72	Ibs
Tear - <i>Trapez</i>	550	N	124	Ibs
Adhesion	70	N/50mm	127	oz/inches
Temperature resistance	-73 to 260	°C	-100 to 500	°F

FIBERFLON® architectural fabrics are made of PTFE coated glass fabrics. The fluoropolymer PTFE is the most durable fabric coating available. The PTFE is applied equally to both sides of the glass fabric. This encapsulates the glass fibers and protects them from potential degradation due to moisture influx. Structures incorporating FIBERFLON® Architectural Fabrics are strong, beautiful and enduring. They require very little maintenance and will continue to outperform all other glazing systems over their 25+ year life. The product does not contain banned substances as described in RoHS directive and will not affect RoHS compliance.



Note: Nominal thickness, weight and tensile strength values are typical and are not intended as a specification minimum. Weight Tolerance g/m² = ±%5
 All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained here in are based on test results FIBERFLON believes to be reliable, but they are not to be construed in any manner as warranties expressed.
 All data is subject to change without notice.