


# FIBERLAM 10M1

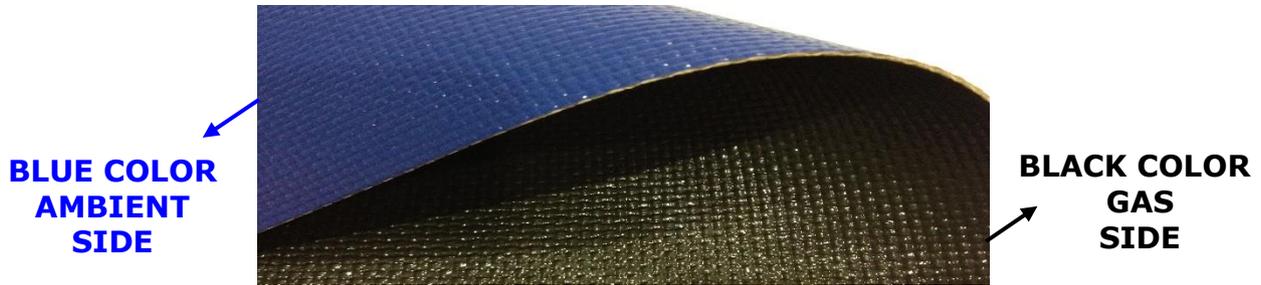

Product	Product category	Lamination
FABRIC EXPANSION JOINT MATERIAL	FIBERLAM SERIE	BOTH SIDE PTFE FILM

Properties	Metric		Imperial	
Standard width(s) <i>Please ask for other widths</i>	1600	mm	63	inches
Thickness	0,95	mm	0.0374	inches
Weight	1345	gr/m <sup>2</sup>	39.67	oz/sq yd
PTFE content	55	%	55	%
Tear strength - diagonal	800	N	180	Ibs
Tear strength - warp x weft	550 x 650	N	124 x 146	Ibs
Tensile strength - warp x weft	7000 x 6500	N/5 cm	800 x 742	Ibs/inches
Temperature resistance	-150 to 316	°C	-238 to 600	°F

**Fiberlam fabric expansion joint laminates**

High quality woven fiberglass fabrics coated with a specially formulated fluoropolymer coating designed to provide enhanced flex properties and excellent high temperature performance, and then laminated with PTFE (Teflon) multilayer films to provide superior gas barrier properties.

Laminated barrier PTFE films reduce permeation of potentially damaging flue gases.

**Permeation resistance**

0.0 µg/cm<sup>2</sup>/minute - The FIBERLAM composite was investigated for permeation by an independent laboratory. Sulfuric acid 2N at 5 psig was used as the test medium. The FIBERLAM composite exhibited zero breakthrough and/or permeation. Test reports available upon request.

The product does not contain banned substances as described in RoHS directive and will not affect RoHS compliance.



This product has been manufactured in a facility certified by ISO 9001 Quality Management System.

Note: Nominal thickness, weight and tensile strength values are typical and are not intended as a specification minimum.

Weight tolerance g/m<sup>2</sup> = ±%5 - Tensile strength tolerance -%10

All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained herein are based on test results FIBERFLON believes to be reliable, but they are not to be construed in any manner as warranties expressed.

All data is subject to change without notice.