


FIBERLAM RB18 AD



PTFE COATED SIDE (RED)

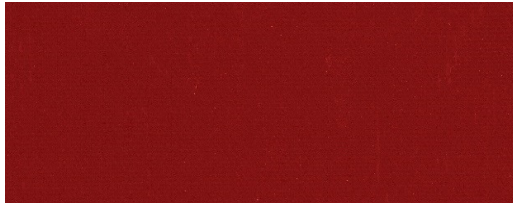

ADHESIVE SIDE (BLUE)

Product	Product category	Coating
PTFE CAST FILM LAMINATED GLASS FABRIC SELF ADHESIVE	FIBERLAM SERIE	PTFE / SILICONE PSA

Properties	Metric		Imperial	
Standard width(s) <i>Please ask for other widths</i>	1000	mm	39.5	inches
Backing thickness <i>(PTFE glass)</i>	0,200	mm	0.0079	inches
Backing weight <i>(PTFE glass)</i>	400	gr/m ²	11.80	oz/sq yd
Total thickness <i>(PTFE glass and silicone PSA)</i>	0,255	mm	0.0100	inches
Adhesion	27,5	N/5 cm	51	oz/inches
Temperature resistance	-73 to 260	°C	-100 to 500	°F

FIBERLAM RB18AD is glass fabric coated with PTFE (Teflon), both side laminated with cast PTFE multilayer film then one side coated with high temperature resistant, silicone pressure sensitive adhesive.

Applications

Packaging industry; blister packaging, release cover for heat sealers, form fill equipment. Lining chutes, guide rails, slides. Platen covers; composite industry.

The product does not contain banned substances as described in RoHS directive and will not affect RoHS compliance.



Note: Nominal thickness, weight and adhesion values are typical and are not intended as a specification minimum. Weight Tolerance g/m² = ±%5
All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained here in are based on test results FIBERFLON believes to be reliable, but they are not to be construed in any manner as warranties expressed.
All data is subject to change without notice.