
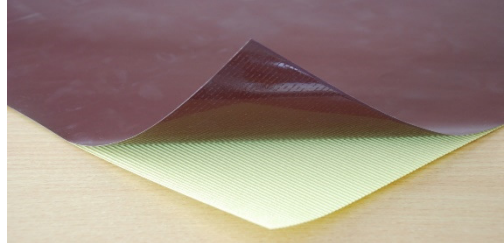


# FIBERLAM RR15 AD

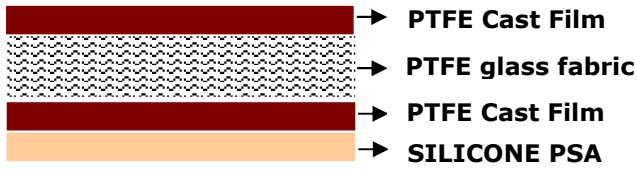

Product	Product category	Lamination
PTFE CAST FILM LAMINATED GLASS FABRIC SELF ADHESIVE	FIBERLAM SERIE	PTFE / SILICONE PSA

Properties	Metric		Imperial	
Standard width(s) <i>Please ask for other widths</i>	1000	mm	39.5	inches
Backing thickness <i>(PTFE glass)</i>	0,160	mm	0.0063	inches
Backing weight <i>(PTFE glass)</i>	320	gr/m <sup>2</sup>	9.44	oz/sq yd
Total thickness <i>(PTFE glass and silicone PSA)</i>	0,215	mm	0.0085	inches
Adhesion	27,5	N/5 cm	51	oz/inches
Temperature resistance	-73 to 260	°C	-100 to 500	°F

FIBERLAM RR15AD is glass fabric coated with PTFE (Teflon), both side laminated with cast PTFE multilayer film then one side coated with high temperature resistant, silicone pressure sensitive adhesive.

**Applications**

UPVC window Frame welding plate release cover, packaging industry; blister packaging, release cover for heat sealers, form fill equipment. Lining chutes, guide rails, slides. Platen covers; composite industry.

The product does not contain banned substances as described in RoHS directive and will not affect RoHS compliance.



Note: Nominal thickness, weight and adhesion values are typical and are not intended as a specification minimum. Weight Tolerance g/m<sup>2</sup> = ±%5  
 All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained here in are based on test results FIBERFLON believes to be reliable, but they are not to be construed in any manner as warranties expressed.  
 All data is subject to change without notice.