


# FIBERLAM RT339

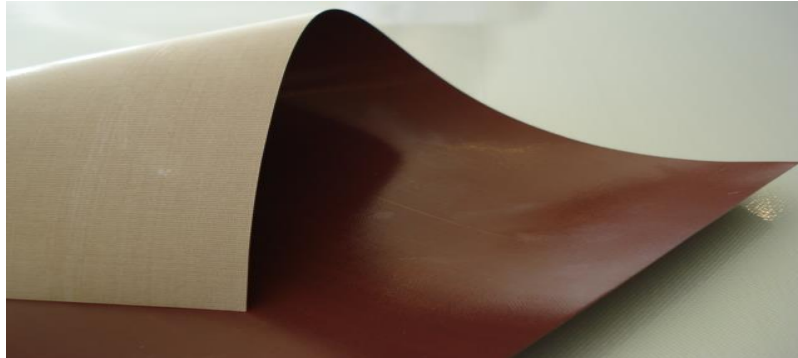

Product	Product category	Lamination
PTFE CAST FILM LAMINATED GLASS FABRIC	FIBERLAM SERIE	MULTILAYER PTFE CAST FILM

Properties	Metric		Imperial	
Standard width(s) <i>Please ask for other widths</i>	1200, 1320	mm	47.3, 52	inches
Thickness	0,24	mm	0.0094	inches
Weight	470	gr/m <sup>2</sup>	13.86	oz/sq yd
PTFE content	69	%	69	%
Tensile strength	2300	N/5 cm	263	Ibs/inches
Temperature resistance	-73 to 260	°C	-100 to 500	°F

FIBERLAM RT339 laminated product features multi-layer PTFE cast film laminated on both sides of a 3 ply laminated PTFE / glass fabric, uniform thickness, crack and pinhole free surface.

**FDA Compliant**

Suitable for use in direct food contact applications under the applicable requirements of, 21CFR 177.1550

**Applications**

Flour tortilla machine conveyor belts, High Temperature Conveyor Belting.

The product does not contain banned substances as described in RoHS directive and will not affect RoHS compliance.



Note: Nominal thickness, weight and tensile strength values are typical and are not intended as a specification minimum. Weight Tolerance g/m<sup>2</sup> = ±%5  
 All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained herein are based on test results FIBERFLON believes to be reliable, but they are not to be construed in any manner as warranties expressed.  
 All data is subject to change without notice.