


# SK 20 AD

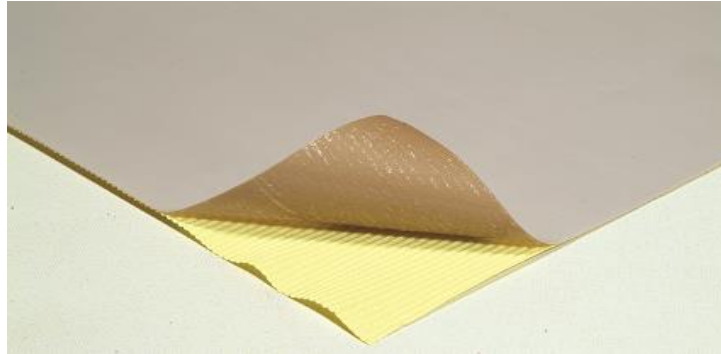

Product	Product category	Coating
PTFE SKIVED FILM SELF ADHESIVE TAPE	ADHESIVE TAPE SERIE	SILICONE PSA

Properties	Metric		Imperial	
Standard width(s) <i>Please ask for other widths</i>	1000	mm	39.5	inches
Backing thickness	0,50	mm	0.0197	inches
Total thickness	0,55	mm	0.0217	inches
Adhesion	31,5	N/5 cm	58	oz/inches
Temperature resistance	-73 to +260	°C	-100 to 500	°F

PTFE skived film with one side coated with a pressure sensitive silicone adhesive. Good strength, abrasion resistance and the low friction properties of Skived PTFE film make it a prime choice for mechanical applications from lining guide rails to wrapping wire harnesses. For mechanical applications and all-purpose use, PTFE tape offers superior low friction and non-stick properties. Please indicate required liner to your order one of below liner: Corrugated Yellow Liner or Flat Transparent Liner. The product does not contain banned substances as described in RoHS directive and will not affect RoHS compliance.



Note: Nominal thickness and adhesion values are typical and are not intended as a specification minimum. All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained here in are based on test results FIBERFLON believes to be reliable, but they are not to be construed in any manner as warranties expressed. All data is subject to change without notice.