




**Style**

**FIBERTEX 1000**

**Description**

This PTFE/glass fabric is specialty designed for fabric expansion joint products.

<b>Product</b>	PTFE GLASS FABRIC FLEXIBLE COMPOSITE	
<b>Coating</b>	PTFE	
<b>Nominal thickness</b>	0,90	mm.
<b>Weight</b>	1120	g/m <sup>2</sup>
<b>PTFE Content</b>	44	%
<b>Tensile strenght</b>	6000	N/5cm.
<b>Max. temperature resistance</b>	310	°C

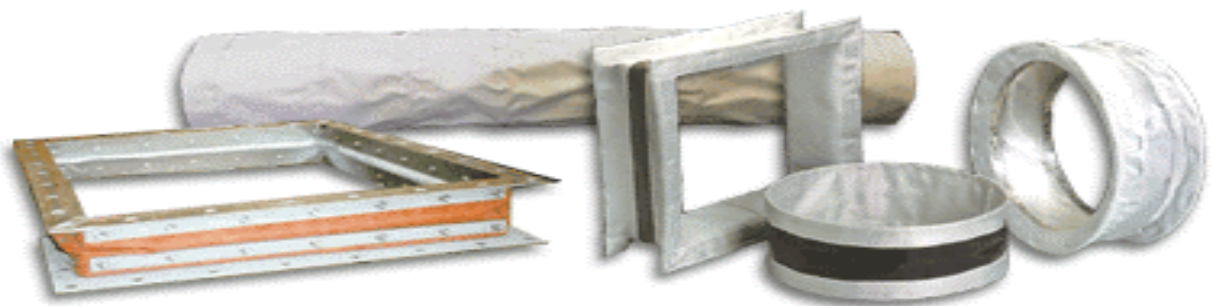

Note: Nominal thickness and tensile strenght values are typical and are not intended as a specification minimum.

Weight Tolerance g/m<sup>2</sup> = ±%5

All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained here in are based on test results FIBERFLON believes to be reliable, but they are not to be constured in any manner as warranties expressed.

All data is subject to change without notice.