


FIBERLAM RT339

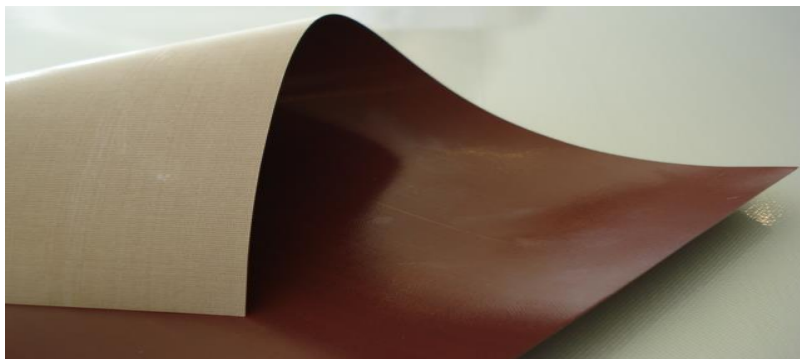

| Product | Product category | Lamination |
|--|------------------|------------------------------|
| PTFE CAST FILM LAMINATED GLASS FABRIC | FIBERLAM SERIE | MULTILAYER PTFE CAST FILM |

| Properties | Metric | | Imperial | |
|---|-------------|-------------------|-------------|------------|
| Standard width(s) <i>Please ask for other widths</i> | 1200, 1320 | mm | 47.3, 52 | inches |
| Thickness | 0,25 | mm | 0.0098 | inches |
| Weight | 520 | gr/m ² | 15.34 | oz/sq yd |
| PTFE content | 72 | % | 72 | % |
| Tensile strength | 2300 | N/5 cm | 263 | Ibs/inches |
| Temperature resistance | -150 to 260 | °C | -238 to 500 | °F |

FIBERLAM RT339 laminated product features multi-layer PTFE cast film laminated on both sides of a 3 ply laminated PTFE / glass fabric, uniform thickness, crack and pinhole free surface.

FDA Compliant

Suitable for use in direct food contact applications under the applicable requirements of, 21CFR 177.1550

Applications

Flour tortilla machine conveyor belts, High Temperature Conveyor Belting.

The product does not contain banned substances as described in RoHS directive and will not affect RoHS compliance.



This product has been manufactured in a facility certified by ISO 9001 Quality Management System.

Note: Nominal thickness, weight and tensile strength values are typical and are not intended as a specification minimum.

Weight tolerance g/m² = ±%5 - Tensile strength tolerance -%10

All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained herein are based on test results FIBERFLON believes to be reliable, but they are not to be construed in any manner as warranties expressed.

All data is subject to change without notice.